



## Technical Features



Maximum range  
SB : 5 m BB : 7 m



Airflow / Length  
3060 - 10720 m<sup>3</sup>/h  
1 m to 3 m



Fans  
Centrifugal  
5-speed



Heating type  
A : unheated



Heating capacity  
-



Control  
Plug&Play Advanced PRO  
+ IR remote control  
(Optional Clever Control)



Casing [\*\*]  
Galvanised steel



Inlet grille  
Circular perforated



Outlet lamellas  
Aluminium, airfoil type  
Adjustable 0-15° each side

RAL 9016  
standard



Other colors  
on request



Stainless  
steel



[\*] Customizable dimensions on request

KOOL SB-BB is a commercial size air curtain with a power equivalent to an industrial unit, with an elegant and timeless design.

This model works with the latest generation of double-inlet centrifugal high efficiency EC fans driven by an external rotor motor, with low noise level and very low consumption. With a large perforated inlet grille avoiding intensive maintenance.

Advanced Plug&Play control. Includes: Advanced PRO control with LCD display and integrated thermostat, door contact, 7m RJ11 cable and remote control. Optional: intelligent Clever PRO Control (automatic, programmable, modbus for PLC, timer, etc).

### UNHEATED



Model	Airflow m <sup>3</sup> /h	Ventilation power 230V~50Hz kW	Ventilation current 230V~50Hz A	Noise level (5 m) dB (A)	Weight kg
KSB 1000 A	3060	0,523	3,8	62	37
KSB 1500 A	4080	0,697	5,07	63	54
KSB 2000 A	6120	1,046	7,61	64	75
KSB 2500 A	7140	1,22	8,87	65	91
KSB 3000 A	8160	1,395	10,14	66	107
KBB 1000 A	4020	0,873	3,87	66	38
KBB 1500 A	5360	1,164	5,16	67	55
KBB 2000 A	8040	1,746	7,74	68	77
KBB 2500 A	9380	2,037	9,03	69	93
KBB 3000 A	10720	2,328	10,32	70	110




Selection program



## Dimensions

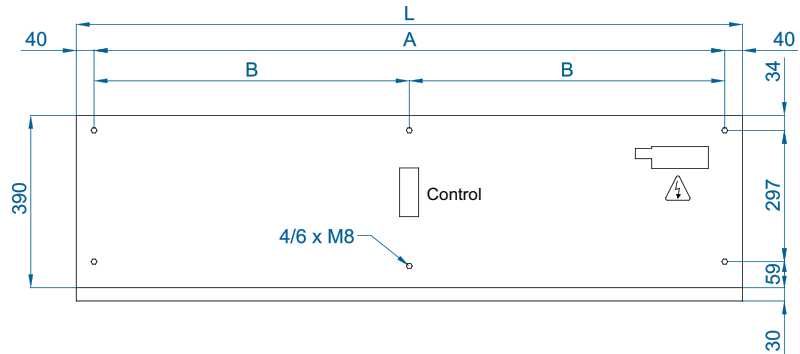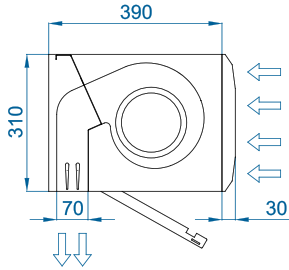

L	A	B
1000	920	-
1500	1420	710
2000	1920	960
2500	2420	1210
3000	2920	1460

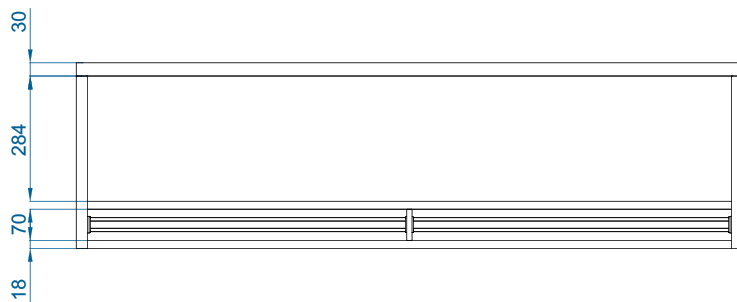

## Optional accessories

### Supports



Wall rail support  
SPWR



Silentblock supports  
SPANG-SIL / SLB



Suspension cables  
SPCT



Foot support  
SPF-KOOL BB  
(Galv. / SS)



Joining kit  
SPJ-KOOL BB  
(Galv. / SS)

### Control



ADVANCED PRO  
✓ Included



IR Control  
✓ Included



RJ11 Cable  
✓ Included




CLEVER PRO

### Sensors



Mechanical door contact  
MEC-DC



Magnetical door contact  
MAG-DC  
✓ Included



External Temperature  
Sensor

CAD drawings, BIM files, installation  
manuals and other documentation

